



Paint Heater




THE PAINT HEATER MODEL 32X1R AND 32X2R

This equipment has been designed to solve the problem of the low temperatures while painting, to guarantee:


- Considerable reduction of paint viscosity
- Maximum thickness of paint film and less fluid passages
- Reduction of pressure and better spray atomization
- Reduction of solvent consumption
- Reduction of drying time

The paintheater has been designed in observance of the antideflagration regulations, it also allows to use of various kind of paints and solvents, thanks to the use of Stainless Steel.

| | |
|---------------------------|---------|
| Electric potential | 3200W |
| Voltage | 240W |
| Electric current | 13.3 A |
| Weight | 19.4 Kg |
| Temperature range | 0-82°C |
| Temperature limit | 106°C |

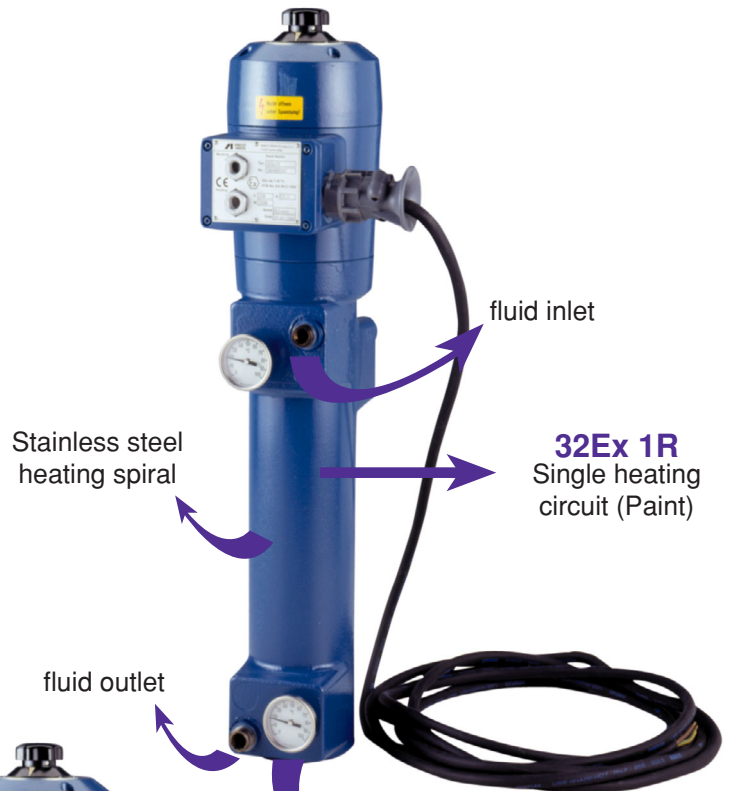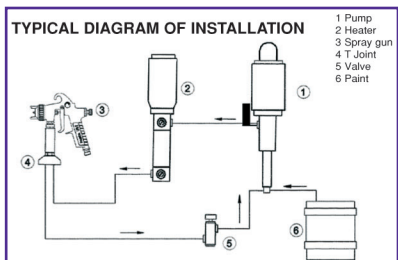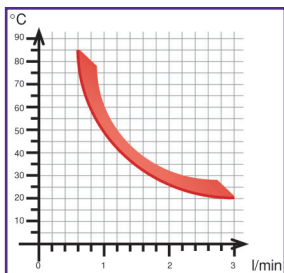

32Ex 1R
Single heating circuit (Paint)

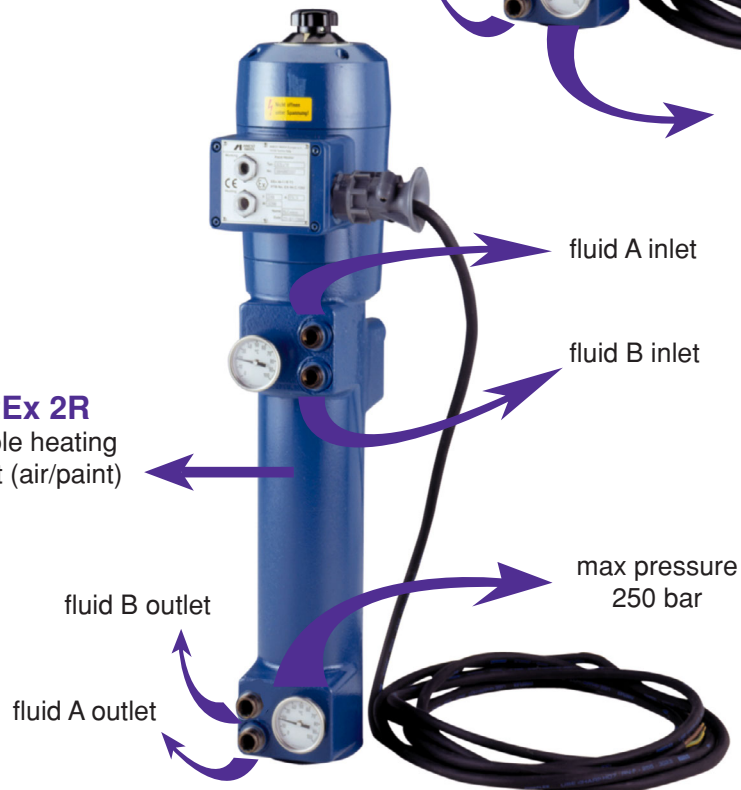

32Ex 2R
Double heating circuit (air/paint)

